

# SPECIFICATION SHEET

V3.0



## PYRE 1 PENDANT

### DESCRIPTION

Tubes of frosted glass at varying lengths break free from their brass cages. PYRE is inspired by the exploding sparks of a Blacksmith's hammer.

### MATERIALS

Brass & glass

### DIMENSIONS

Length: 1853mm (73.0")  
Width: 43mm (1.7")  
Height: 586mm (23.1")

### WEIGHT

5kg (11lbs)

### LAMPING

LED G4 Globe

### LED COLOUR TEMP

Warm White 2700k

### VOLTAGE/WATTAGE

12V DC @ 5W

### LUMENS

300lm

\*From the source

### DRIVER

12V 25W 0-10V DIMMABLE

### STANDARD FINISHES

Blonde Brass, Aged Brass, Dark Bronze (these finishes are waxed)

### CUSTOM SURFACE FINISHES

Brushed Nickel, Chrome plating (Add 20%)

Clear enamel & powder coated finishes available on request (Add 10%)

### MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

### MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

### ROD LENGTH

LOST PROFILE offers rods at four lengths

(mm): 250, 500, 750, 1000

(in): 9.8, 19.7, 29.5, 39.4

Three rods up to 1000mm (39.4") are included in the price of this item.

Please consider the height of the fixture itself when selecting a rod.

Additional rods are extra.

### CEILING CANOPY

Option 1 - Standard: Flush Canopy: x1 Round Flush canopy (Remote)

Ø150 x 6mm (Ø5.9 x 0.2in).

Option 2 - Surface Canopy: x1 Round Surface canopy (Integral)



Ø250 x 50mm (Ø9.8 x 2.0in). Upcharge applies.

### DRIVERS & DIMMING

LOST PROFILE products are supplied with 0-10V dimmable LED drivers.

PHASE & DALI Dimmable drivers are available for some regions, upon request.



The location of the driver needs to be considered, whether in a ceiling cavity, in a wall cavity, or ideally in an accessible electrical cabinet.

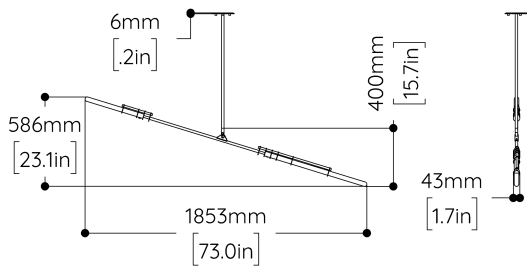

### OPTION 1 (STANDARD)

Flush Canopy

Remote power supply



### OPTION 2

Surface Canopy

Integral power supply

Upcharge applies